

BAT42 THRU BAT43

SCHOTTKY DIODES

FEATURES:

- Low Forward Voltage drop
- Fast general purpose applications
- These diodes feature very low turn-on voltage and swifing. These devices are protected by a PN junction guard ring against excessive voltage, such as electrostatic discharges.
- These diodes are also available in the SOD-123 case with the type designation BAT42W to BAT43W

MECHANICAL DATA


Case : DO-35 Glass case

Polarity : Cathode band

Leads : Solderable per MIL-STD-202, Method 208

Weight : 0.13 grams

DO-35

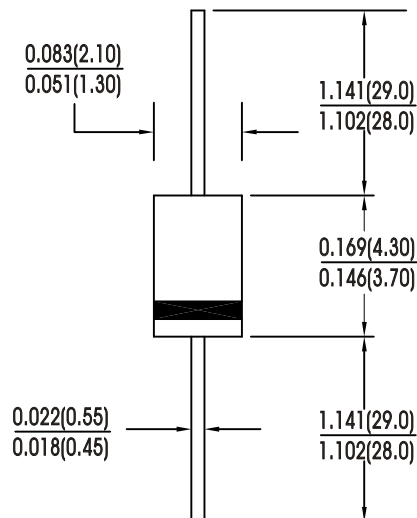

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

| Characteristic | Symbol | BAT42 | BAT43 | Units |
|--|-------------|-------------------|---------------------|------------------|
| Maximum recurrent peak reverse voltage | V_{RRM} | 30 | 30 | Volts |
| Forward continuous current at $T_a=25^\circ\text{C}$ | I_F | 0.2 ¹⁾ | | Amps |
| Surge forward current at $t_p < 10\text{ms}$, $T_{amb}=25^\circ\text{C}$ | I_{FSM} | 4 ¹⁾ | | Amps |
| Power dissipation at $T_{amb}=25^\circ\text{C}$ | P_{tot} | 200 ¹⁾ | | mW |
| Minimum Reverse breakdown tested at $I_{BR}=100\mu\text{A}$ | $V_{(BR)R}$ | 30 | | Volts |
| Maximum instantaneous forward voltage Both Typs $I_F=200\text{mA}$ $I_F=10\text{mA}$ $I_F=50\text{mA}$ $I_F=2\text{mA}$ $I_F=15\text{mA}$ | V_F | 0.40 0.65 | 1.0 0.33 0.45 | Volts |
| Maximum leakage current at $V_R=25\text{V}$ $T_a=25^\circ\text{C}$ $T_a=100^\circ\text{C}$ | I_R | 0.5 100 | | μA |
| Total capacitance at $V_R=1\text{V}$, $f=1\text{MHz}$ | C_{tot} | 7 | | P_F |
| Maximum reverse recovery time from $I_F=I_R=0.01\text{A}$, $I_{RR}=1\text{mA}$, $R_L=100$ | T_{RR} | 5.0 | | nS |
| Ambient operating temperature range | T_{amb} | -65to+125 | | $^\circ\text{C}$ |
| Storage temperature range | T_{stg} | -65to+150 | | $^\circ\text{C}$ |

NOTES:

(1) Valid provided that leads at a distance of 4mm from the case are kept at ambient temperature

RATINGS AND CHARACTERISTIC CURVES BAT42 THRU BAT43

FIG. 1-ADMISSIBLE POWER DISSIPATION

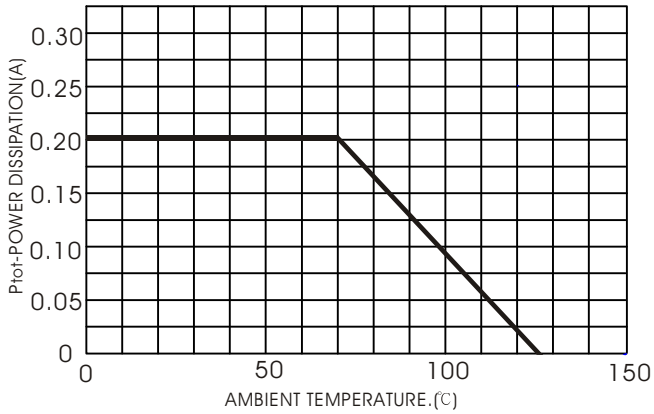


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

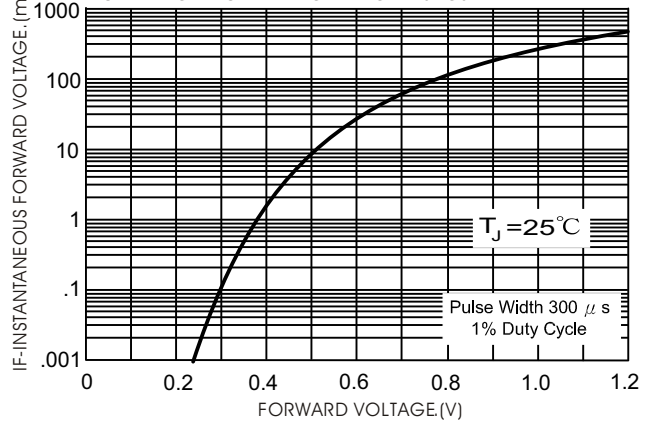


FIG. 3-TYPICAL REVERSE CHARACTERISTIC

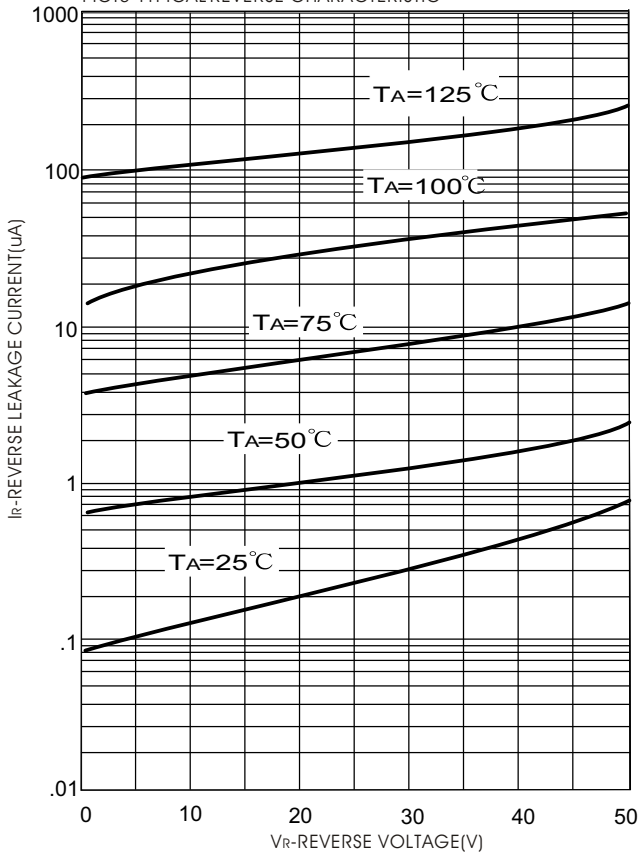


FIG. 4-TYPICAL CAPACITANCE

