



INDUSTRIAL PRESS-FIT POWER RECTIFIERS TYPE 35A

Features

- High Surge Capability
- High Voltage Available
- Designed For A Wide Range of Application
- Leaded Version Available
- Types Up to 1000V V_{RRM}
- Open junction


**35Amp Rectifier
50-1000 Volts**

**PRESS - FIT
BOSCH**

Maximum Ratings

Operating Temperature: -40°C to $+175^{\circ}\text{C}$
Storage Temperature: -40°C to $+175^{\circ}\text{C}$

Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
PFBM3501-1(R)	50V	35V	50V
PFBM3502-1(R)	100V	70V	100V
PFBM3503-1(R)	200V	140V	200V
PFBM3504-1(R)	400V	280V	400V
PFBM3505-1(R)	600V	420V	600V
PFBM3506-1(R)	800V	560V	800V
PFBM3507-1(R)	1000V	700V	1000V

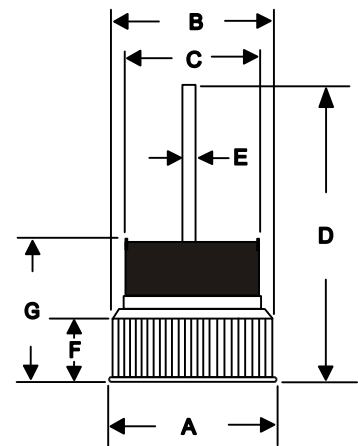

Electrical Characteristics @ 25 °C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	35 A	$T_C = 150^{\circ}\text{C}$
Peak Forward Surge Current	I_{FSM}	400A	8.3ms, half sine
Maximum Instantaneous Forward Voltage *	V_F	1.0V 1.1V	$I_{FM} = 35A;$ $I_{FM} = 80A;$ $T_A = 25^{\circ}\text{C}$
Maximum Instantaneous DC Reverse Current At Rated DC Blocking Voltage	I_R	5 uA 500uA	$T_A = 25^{\circ}\text{C}$ $T_C = 100^{\circ}\text{C}$
Maximum thermal resistance, junction to case	$R_{\theta jc}$	1.0 °C /w	

Notes:

1. Standard Polarity: Lead is Cathode
2. Reverse Polarity: Lead is Anode

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	0.504	0.520	12.80	13.20	
B	0.503	0.506	12.77	12.85	
C	0.391	0.393	9.92	9.98	
D	1.300 Min.		33.00 Min.		
E	0.050 Typ.		1.28 Typ.		
F	0.169	0.185	4.30	4.70	
G	0.394 Typ.		10.00 Typ.		

*Pulse Test: Pulse Width 300 usec, Duty Cycle 2%



FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

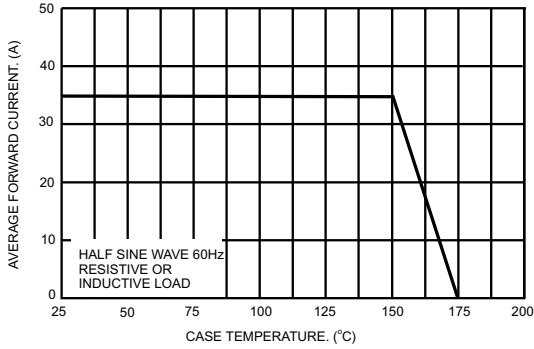


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

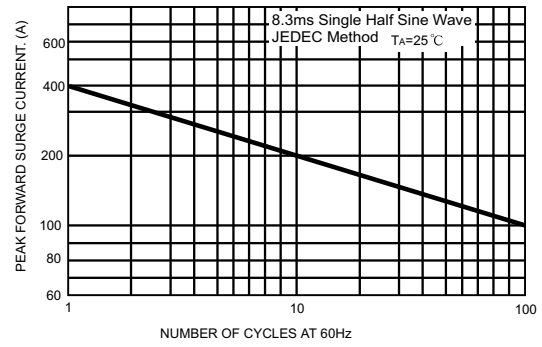


FIG.3- TYPICAL FORWARD CHARACTERISTICS

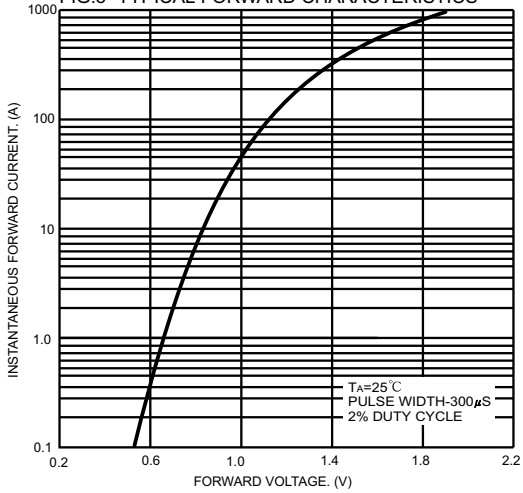


FIG.4- TYPICAL REVERSE CHARACTERISTICS

