



**INDUSTRIAL PRESS-FIT POWER RECTIFIERS TYPE 25A**

**Features**

- High Surge Capability
- High Voltage Available
- Designed For A Wide Range of Application
- Leaded Version Available
- Types Up to 600V  $V_{RRM}$
- Open junction


25Amp Rectifier  
50-600 Volts

**PRESS - FIT**

**Maximum Ratings**

Operating Temperature:  $-65^{\circ}\text{C}$  to  $+190^{\circ}\text{C}$   
Storage Temperature:  $-65^{\circ}\text{C}$  to  $+190^{\circ}\text{C}$

Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
PFDL2501(R)	50V	35V	50V
PFDL2502(R)	100V	70V	100V
PFDL2503(R)	200V	140V	200V
PFDL2504(R)	400V	280V	400V
PFDL2505(R)	600V	420V	600V

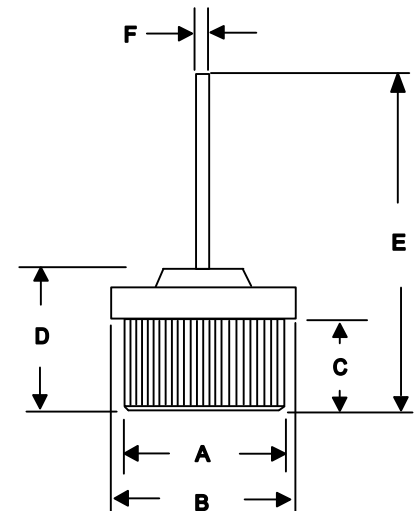

**Electrical Characteristics @ 25 °C Unless Otherwise Specified**

Average Forward Current	$I_{F(AV)}$	25A	$T_C = 150^{\circ}\text{C}$
Peak Forward Surge Current	$I_{FSM}$	400A	8.3ms, half sine
Maximum Instantaneous Forward Voltage *	$V_F$	1.0V 1.1V	$I_{FM} = 25A; T_A = 25^{\circ}\text{C}$ $I_{FM} = 50A; T_A = 25^{\circ}\text{C}$
Maximum Instantaneous DC Reverse Current At Rated DC Blocking Voltage	$I_R$	5uA 500uA	$T_A = 25^{\circ}\text{C}$ $T_A = 100^{\circ}\text{C}$
Maximum thermal resistance, junction to case	$R_{\theta jc}$	1.2 °C /w	

- Notes:  
1. Standard Polarity: Lead is Cathode  
2. Reverse Polarity: Lead is Anode

DIM	DIMENSIONS				NOTE
	INCHES		MM		
	MIN	MAX	MIN	MAX	
A	0.501	0.505	12.73	12.82	
B	0.621	0.629	15.77	15.97	
C	0.224	0.232	5.70	5.90	
D	0.378	0.390	9.60	9.90	
E	0.888	0.900	22.55	22.85	
F	0.098	0.106	2.50	2.70	

\*Pulse Test: Pulse Width 300 usec, Duty Cycle 2%



FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

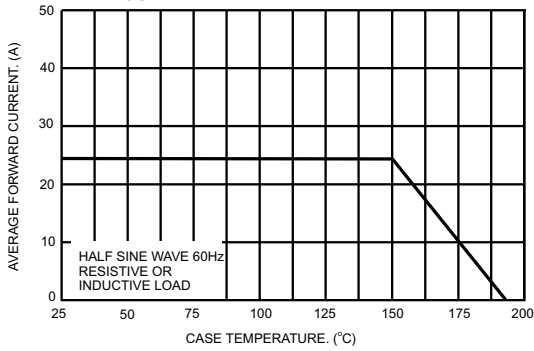


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

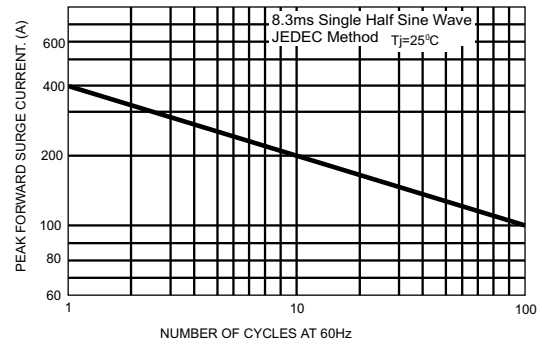


FIG.3- TYPICAL FORWARD CHARACTERISTICS

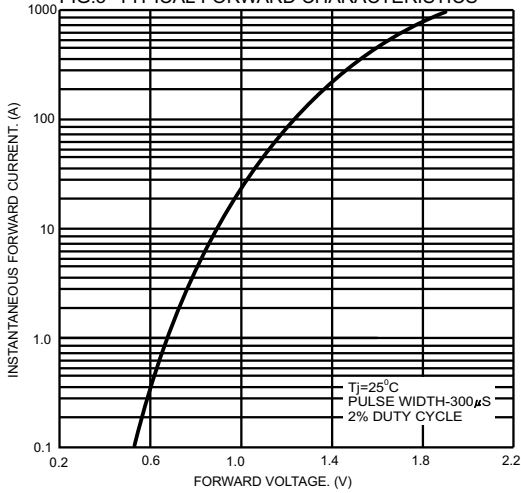


FIG.4- TYPICAL REVERSE CHARACTERISTICS

