

SRF1520CT THUR SRF1560CT

SCHOTTKY BARRIER RECTIFIERS


ITO-220AB

FEATURES:

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive centertap
- Metal silicon junction Majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case

MECHANICAL DATA

Case : JEDEC ITO-220AB molded plastic
 Terminals : Leads solderable per MIL-STD-750 Method 2026
 Polarity : As marked
 Mounting Position : Any
 Mounting Torque 5 in - lbs. max
 Weight : 0.08 ounce, 2.24 grams

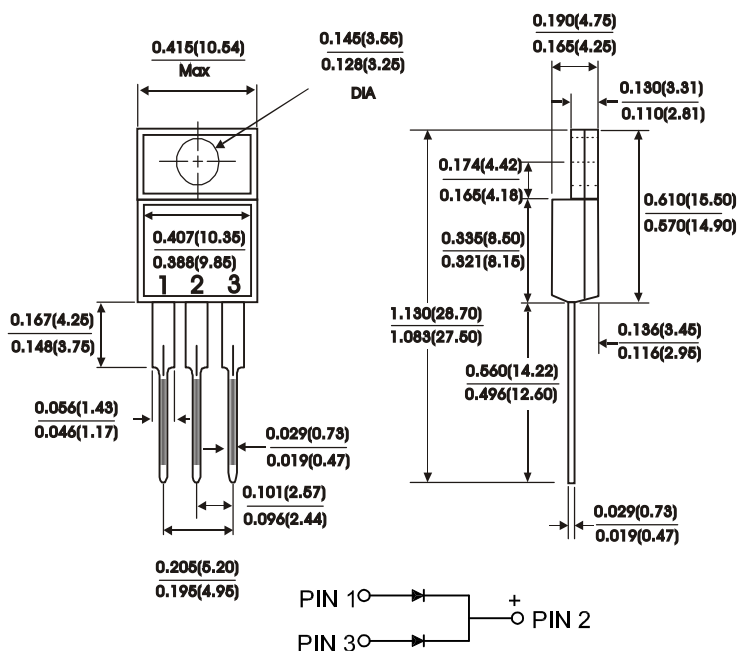

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristic	Symbol	SRF 1520CT	SRF 1530CT	SRF 1535CT	SRF 1540CT	SRF 1545CT	SRF 1550CT	SRF 1560CT	Units
Maximum recurrent peak reverse voltage	V_{RRM}	20	30	35	40	45	50	60	Volts
Maximum RMS voltage	V_{RMS}	14	21	25	28	32	35	42	Volts
Maximum DC blocking voltage	V_{DC}	20	30	35	40	45	50	60	Volts
Maximum average forward rectified current at $T_c = 125^\circ\text{C}$	$I_{(AV)}$	15							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)(Per leg)	I_{FSM}	150							Amps
Maximum instantaneous forward voltage (Per leg)(NOTE 2) $I_F = 7.5\text{A}$	V_F	0.63					0.75		Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Per leg)(NOTE 2) $T_c = 25^\circ\text{C}$ $T_c = 125^\circ\text{C}$	I_R					0.5			mA
Typical thermal resistance (Per leg)(NOTE 1)	R_{th-JC}	5.0							$^\circ\text{C}/\text{W}$
Operating temperature range	T_J	-65to+150							$^\circ\text{C}$
Storage temperature range	T_{Stg}	-65to+175							$^\circ\text{C}$

NOTES:

(1) Thermal resistance from junction to case

(2) Pulse test : 300 us pulse width, 1% duty cycle

(3) Marking : $\frac{\text{SRF1520CT}}{\text{Symbol}} = \frac{\text{SRF1520}}{\text{Marking}}$ (Whitout Marking "CT")

RATINGS AND CHARACTERISTIC CURVES SRF1520CT THRU SRF1560CT

FIG.1 - TYPICAL FORWARD CURRENT DERATING CURVE

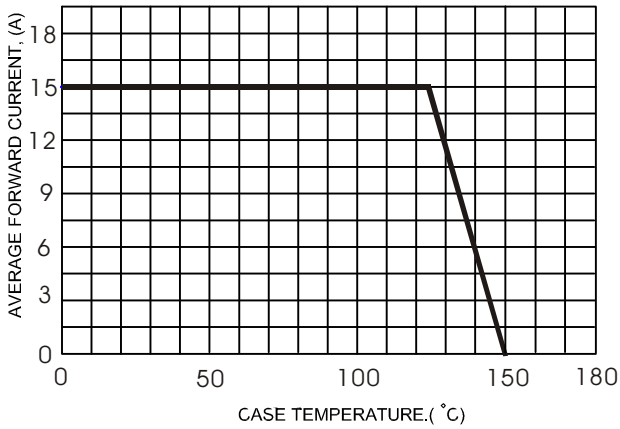


FIG.2 - TYPICAL FORWARD CHARACTERISTICS

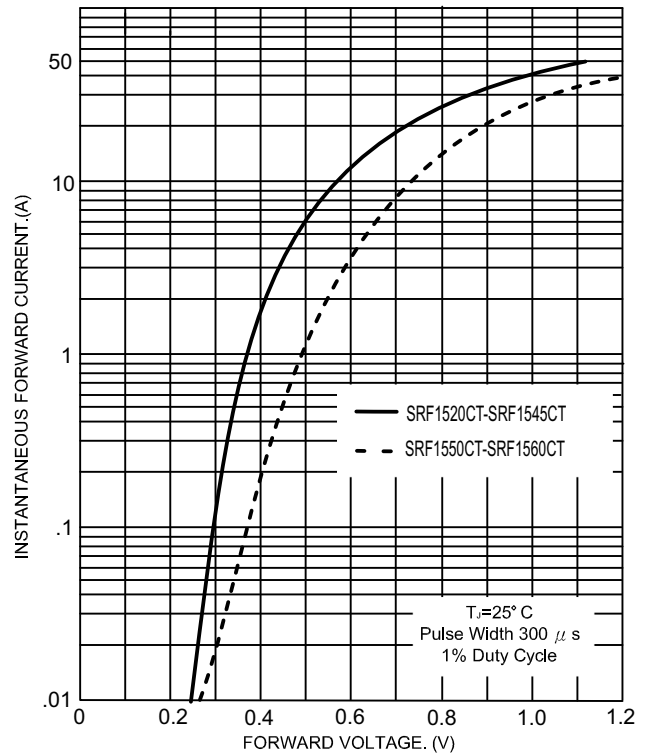


FIG.3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

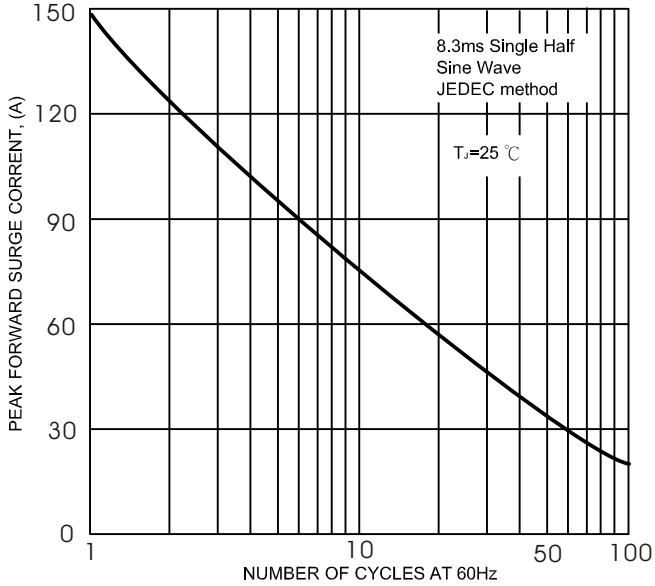


FIG.5- TYPICAL REVERSE CHARACTERISTICS

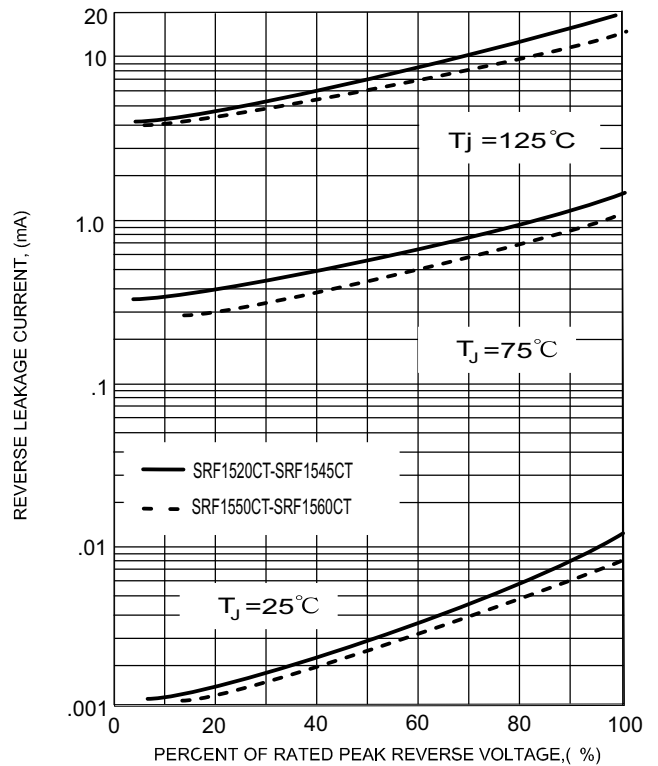


FIG.4- TYPICAL JUNCTION CAPACITANCE

