

SRF20H20CT THUR SRF20H60CT

SCHOTTKY BARRIER RECTIFIERS


ITO-220AB

FEATURES:

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive centertap
- Metal silicon junction Majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case

MECHANICAL DATA

Case : JEDEC ITO-220AB molded plastic
 Terminals : Leads solderable per MIL-STD-750 Method 2026
 Polarity : As marked
 Mounting Position : Any
 Mounting Torque 5 in - lbs. max
 Weight : 0.08 ounce, 2.24 grams

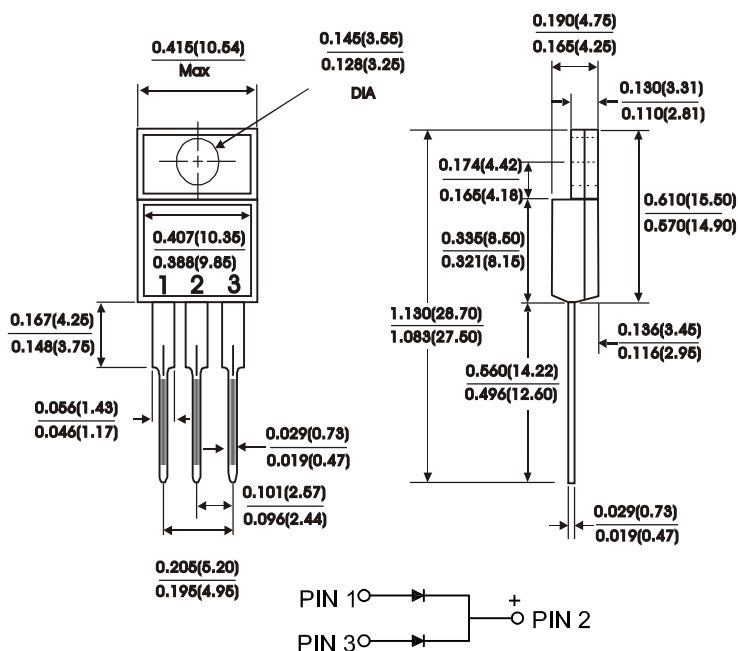

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase half wave, 60 Hz resistive or inductive load.
 For capacitive load, derate current by 20%.

Characteristic	Symbol	SRF 20H20CT	SRF 20H30CT	SRF 20H35CT	SRF 20H40CT	SRF 20H45CT	SRF 20H50CT	SRF 20H60CT	Units
Maximum recurrent peak reverse voltage	V_{RRM}	20	30	35	40	45	50	60	Volts
Maximum RMS voltage	V_{RMS}	14	21	25	28	32	35	42	Volts
Maximum DC blocking voltage	V_{DC}	20	30	35	40	45	50	60	Volts
Maximum average forward rectified current at See figure 1	$I_{(AV)}$	20							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)(Per leg)	I_{FSM}	150							Amps
Maximum instantaneous forward voltage (Per leg)(NOTE 2) $I_F = 10A$	V_F	0.63					0.71		Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Per leg)(NOTE 2) $T_c = 25^\circ C$ $T_c = 125^\circ C$	I_R					100			μA mA
Typical thermal resistance(Per leg)(NOTE 1)	R_{th-JC}					4.0			$^\circ C/W$
Operating temperature range	T_J					-65to+175			$^\circ C$
Storage temperature range	T_{Stg}					-65to+175			$^\circ C$

NOTES:
 (1) Thermal resistance from junction to case
 (2) Pulse test : 300 us pulse width, 1% duty cycle
 (3) Marking : $\frac{SRF20H20CT}{Symbol} = \frac{SRF20H20}{Marking}$ (Whitout Marking "CT")

RATINGS AND CHARACTERISTIC CURVES SRF20H20CT THRU SRF20H60CT

FIG.1 - TYPICAL FORWARD CURRENT DERATING CURVE

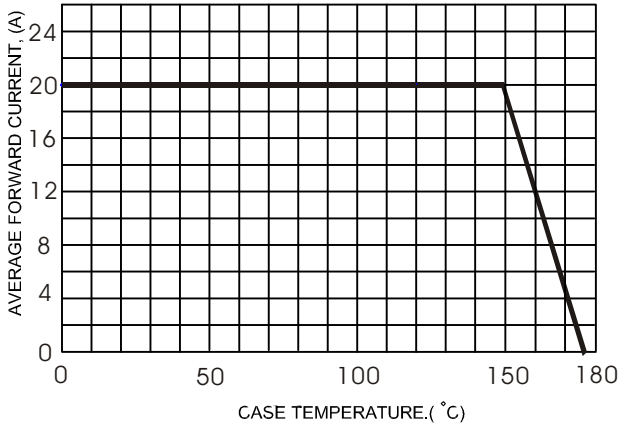


FIG.2 - TYPICAL FORWARD CHARACTERISTICS

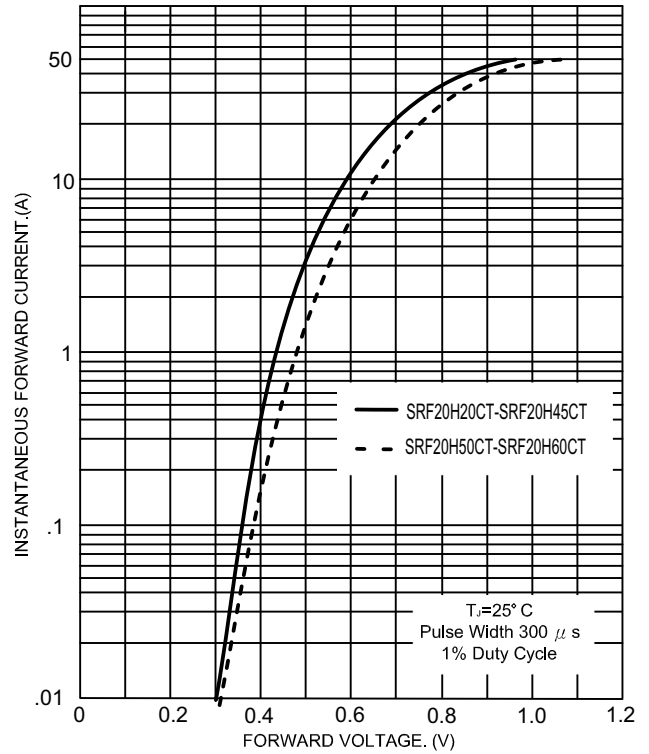


FIG.3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

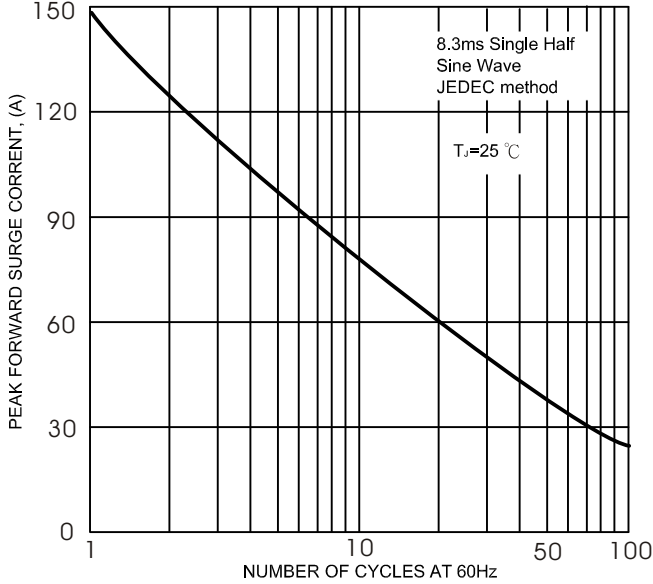


FIG.5- TYPICAL REVERSE CHARACTERISTICS

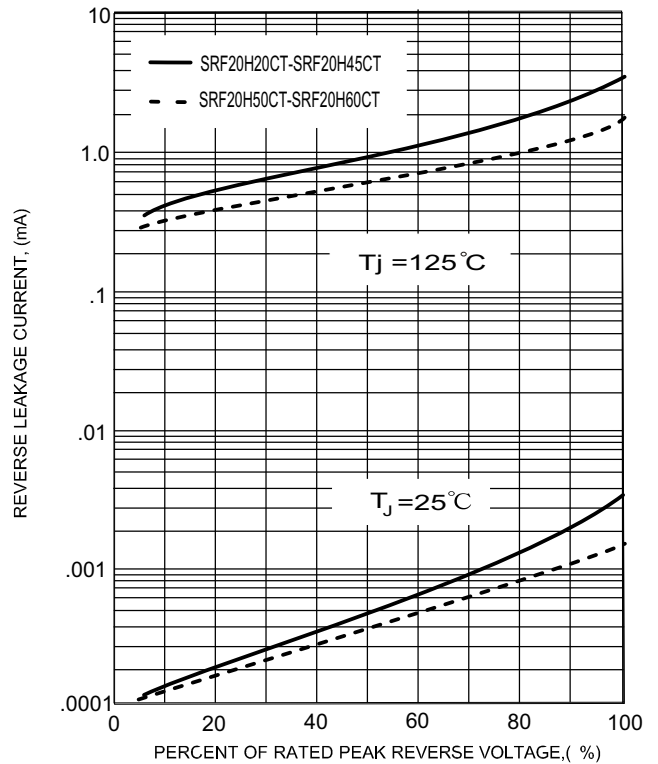


FIG.4- TYPICAL JUNCTION CAPACITANCE

