

# GBU6A      THRU      GBU6M

## SINGLE PHASE GLASS PASSIVATED BRIDGE


### GBU

#### FEATURES:

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- High case dielectric strength of 1500 V<sub>RMS</sub>
- Ideal for printed circuit boards
- Glass passivated chip junction
- High surge overload rating
- High temperature soldering guaranteed:  
260 °C/10 seconds 0.375" (9.5mm) lead Length

#### MECHANICAL DATA

**Case:** Molded plastic body over passivated junctions  
**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026  
**Mounting Position:** Any (NOTE 2)

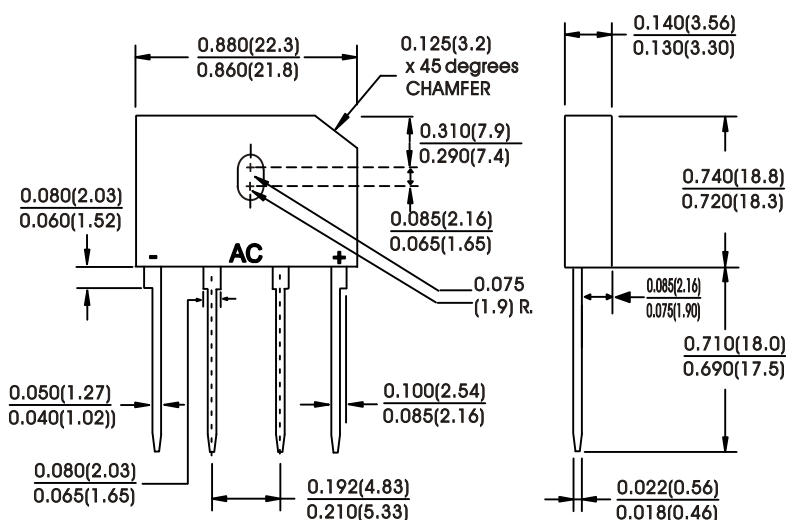

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25° C ambient temp. unless otherwise specified.  
 Single phase, half sine wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20 %.

| Characteristic  | Symbol                                   | GBU 6A      | GBU 6B | GBU 6D | GBU 6G | GBU 6J | GBU 6K | GBU 6M | Units              |    |
|---|--|-------------|--------|--------|--------|--------|--------|--------|--------------------|----|
| Maximum recurrent peak reverse voltage  | V <sub>RRM</sub>                         | 50          | 100    | 200    | 400    | 600    | 800    | 1000   | Volts              |    |
| Maximum RMS voltage   | V <sub>RMS</sub>                         | 35          | 70     | 140    | 280    | 420    | 560    | 700    | Volts              |    |
| Maximum DC voltage  | V <sub>DC</sub>                          | 50          | 100    | 200    | 400    | 600    | 800    | 1000   | Volts              |    |
| Maximum average forward rectified current at T <sub>c</sub> =100°C (NOTE1, 2)                     | I <sub>o</sub>                           | 6.0         |        |        |        |        |        |        | Amps               |    |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) | I <sub>FSM</sub>                         | 175         |        |        |        |        |        |        | Amps               |    |
| Rating for fusing (t < 8.3ms)   | I <sup>2</sup> T                         | 127.0       |        |        |        |        |        |        | A <sup>2</sup> Sec |    |
| Maximum instantaneous forward voltage drop per leg at 6.0A  | V <sub>F</sub>                           | 1.1         |        |        |        |        |        |        | Volts              |    |
| Maximum DC reverse current at rated DC blocking voltage (Per leg)                                 | I <sub>R</sub>                           | 5.0<br>500  |        |        |        |        |        |        | μA                 |    |
| Typical junction (Per leg) (NOTE3)  | C <sub>J</sub>                           | 211.0       |        |        |        | 94.0   |        |        |                    | PF |
| Typical thermal resistance (Per leg) (NOTE1, 2)   | R <sub>th JA</sub><br>R <sub>th JL</sub> | 7.4<br>2.2  |        |        |        |        |        |        | °C/W               |    |
| Operating Junction and storage temperature range  | T <sub>J</sub> , T <sub>stg</sub>        | -55 to +150 |        |        |        |        |        |        | °C                 |    |

NOTES:  
 (1) Unit case mounted on 2.6 x 1.4 x 0.06" thick (6.5 x 3.5 x 0.15cm) Al. plate heatsink  
 (2) Recommended mounted position is bolt to down on heatsink with silicone thermal compound for maximum heat transfer with #6 screws  
 (3) Measured at 1.0 MHz and applied reverse of 4.0 Volts

# RATINGS AND CHARACTERISTIC CURVES GBU6A THRU GBU6M

