

DB101GS THRU DB107GS

SINGLE PHASE GLASS PASSIVATED BRIDGE RECTIFIERS


DB-GLS

FEATURES:

- Ideal for printed circuit board
- Reliable low cost construction utilizing molded plastic technique
- High surge current capability
- Small size, simple installation

MECHANICAL DATA

Case : Molded plastic
 Terminals : Plated terminals, solderable per MIL-STD-202, Method 208
 Polarity : Polarity symbols marked on body
 Mounting Position : Any
 Handling Precaution : None

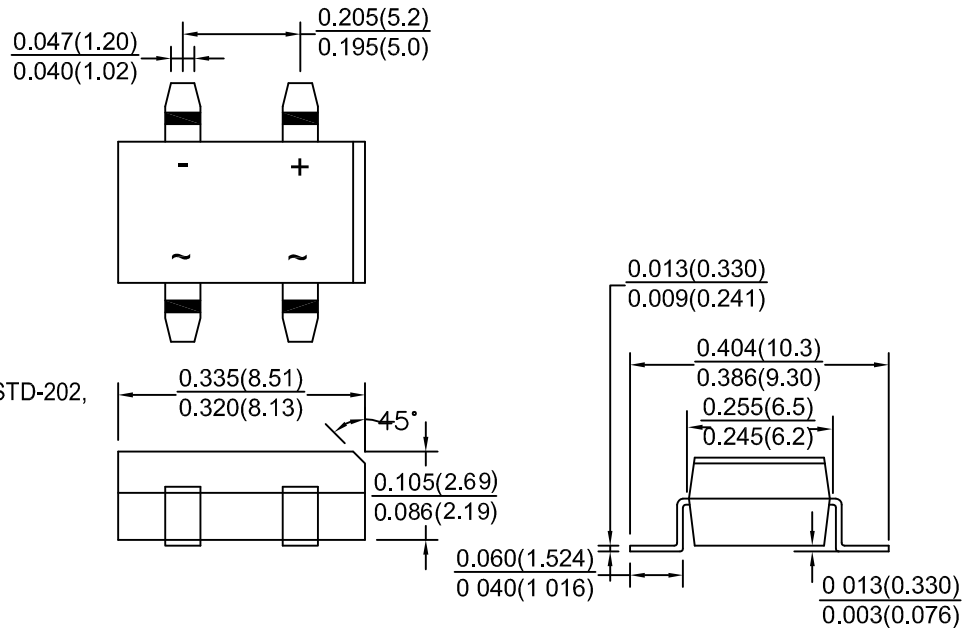

Dimension in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25° C ambient temp. temperatur unless otherwise specified.
 Single phase, half sine, wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20 %.

Characteristic	Symbol	DB 101G	DB 102G	DB 103G	DB 104G	DB 105G	DB 106G	DB 107G	Units
Maximum recurrent peak reverse voltage	VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	VRMS	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified current at Ta=40° C	IO	1.0							Amps
Peak forward surge current ,8.3ms single half sine-wave superimposed on rated load(JEDEC Method)	IFSM	30							Amps
Maximum instantaneous forward voltage drop at 1.0 A	VF	1.1							Volts
Maximum DC reverse current at rated DC blocking voltage	IR	5.0 500.0							μ A
Typical junction capacitance	Cj	25							pF
Typical thermal resistance	Rth-JA	20.0							° C/W
Operating junction and storage temperature range	Tj, Tstg	-65 to +150							° C

