


# FM320 THRU FM3100

Silicon epitaxial planer type

## Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O Utilizing Flame Retardant Epoxy Molding Compound.
- For surface mounted applications.
- Exceeds environmental standards of ML-S-19500 / 228
- Low leakage current

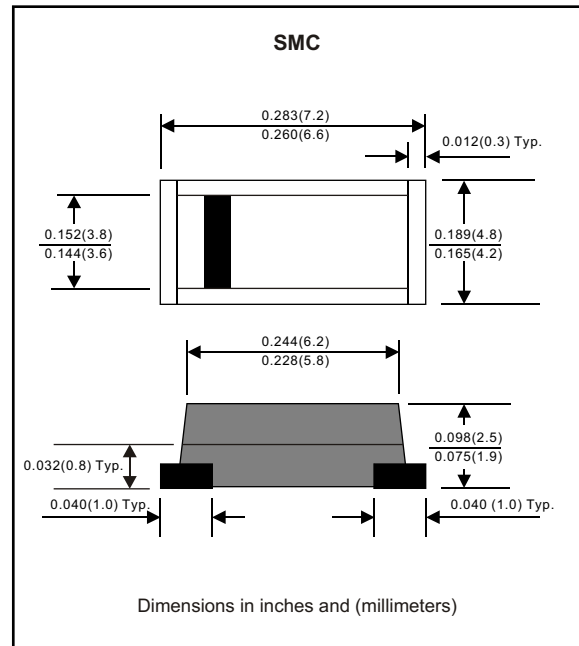

## Mechanical data

Case : Molded plastic, JEDEC DO-214AB

Terminals : Solder plated, solderable per MIL-STD-750, Method 2026

Polarity : Indicated by cathode band

Mounting Position : Any

Weight : 0.00585 ounce, 0.195 gram

## MAXIMUM RATINGS (AT $T_A=25^{\circ}\text{C}$ unless otherwise noted)

| PARAMETER                  | CONDITIONS  | Symbol    | MIN. | TYP. | MAX. | UNIT                          |
|----------------------------|---|-----------|------|------|------|-------------------------------|
| Forward rectified current  | See Fig.1   | $I_O$     |      |      | 3.0  | A                             |
| Forward surge current      | 8.3ms single half sine-wave superimposed on rate load (JEDEC methode) | $I_{FSM}$ |      |      | 80   | A                             |
| Reverse current            | $V_R = V_{RRM}$ $T_A = 25^{\circ}\text{C}$                            | $I_R$     |      |      | 0.5  | mA                            |
|                            | $V_R = V_{RRM}$ $T_A = 125^{\circ}\text{C}$                           |           |      |      | 20   | mA                            |
| Thermal resistance         | Junction to ambient   | $R_{JA}$  |      | 55   |      | $^{\circ}\text{C} / \text{w}$ |
| Diode junction capacitance | f=1MHz and applied 4vDC reverse voltage                               | $C_J$     |      | 250  |      | pF                            |
| Storage temperature        |   | $T_{STG}$ | -55  |      | +150 | $^{\circ}\text{C}$            |

| SYMBOLS | MARKING CODE | $V_{RRM}^{*1}$<br>(V) | $V_{RMS}^{*2}$<br>(V) | $V_R^{*3}$<br>(V) | $V_F^{*4}$<br>(V) | Operating temperature<br>( $^{\circ}\text{C}$ ) |
|---------|--------------|-----------------------|-----------------------|-------------------|-------------------|---|
| FM320   | SS32         | 20                    | 14                    | 20                | 0.50              | -55 to +125                                     |
| FM330   | SS33         | 30                    | 21                    | 30                |                   |   |
| FM340   | SS34         | 40                    | 28                    | 40                |                   |   |
| FM350   | SS35         | 50                    | 35                    | 50                | 0.75              | -55 to +150                                     |
| FM360   | SS36         | 60                    | 42                    | 60                |                   |   |
| FM380   | SS38         | 80                    | 56                    | 80                | 0.85              |   |
| FM3100  | S310         | 100                   | 70                    | 100               |                   |   |

\*1 Repetitive peak reverse voltage

\*2 RMS voltage

\*3 Continuous reverse voltage

\*4 Maximum forward voltage

## RATING AND CHARACTERISTIC CURVES (FM320 THRU FM3100)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

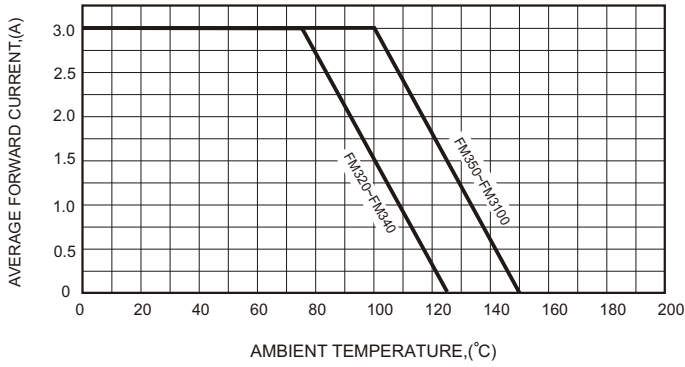


FIG.2-TYPICAL FORWARD CHARACTERISTICS

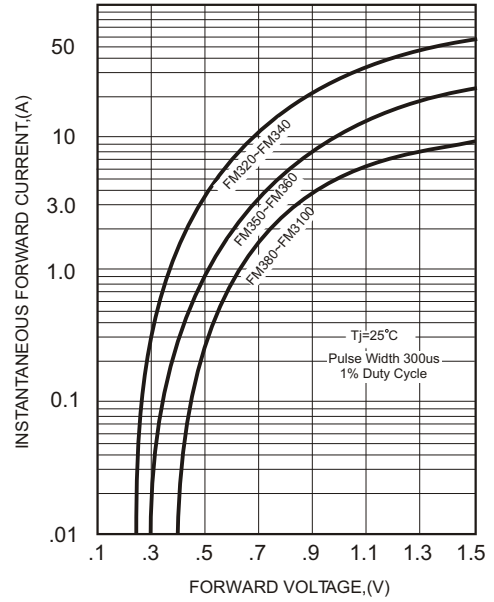


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

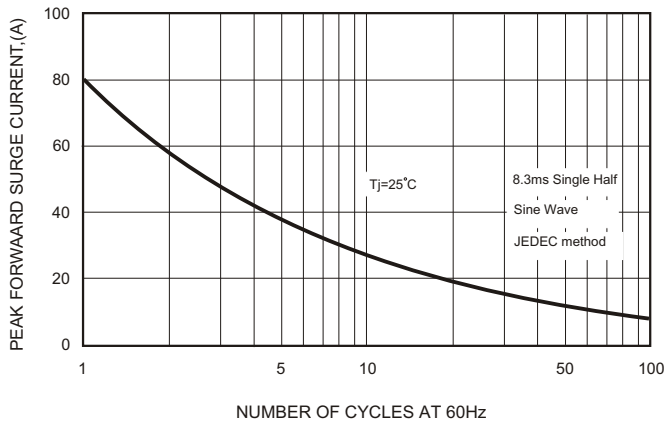


FIG.4-TYPICAL JUNCTION CAPACITANCE

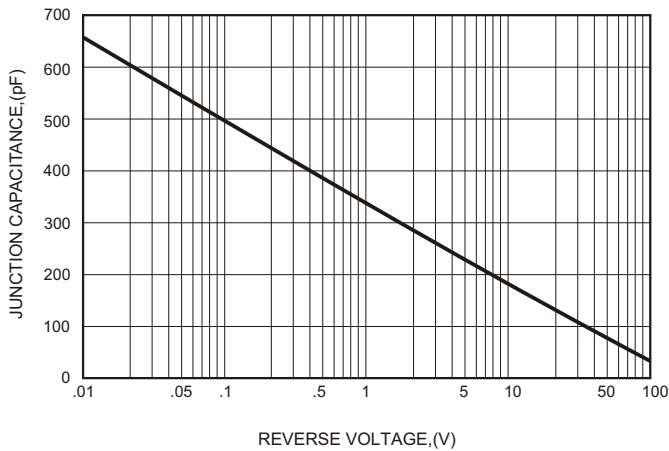


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

