

3-TERMINAL 1A POSITIVE VOLTAGE REGULATORS


The LM78XX series of three-terminal positive regulators, – fixed output voltage and TO-220 package – are designed for a wide range of applications.

These applications include on-card regulation for elimination of noise and distribution problems associated with single point regulation. In addition, they can be used with power pass elements to make high current voltage regulators.

If adequate heat sinking is provided, each of these regulators can deliver up to 1A of output current.

Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltage and currents.

TO-220 PKG(FRONT VIEW)

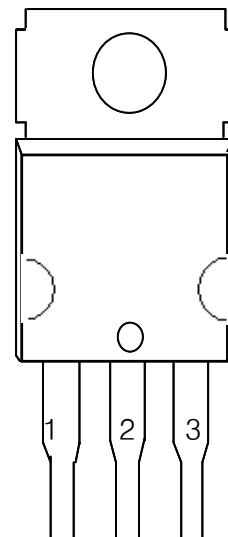

PIN FUNCTION
1. INPUT
2. GND
3. OUTPUT

ORDERING INFORMATION

DEVICE	MARKING	PACKAGE
LM78XX	LM78XX	TO-220


FEATURES

- ◇ Output current in excess of 1A
- ◇ No external components required
- ◇ Internal short circuit current limiting
- ◇ Internal thermal overload protection
- ◇ Output transistor safe-area compensation
- ◇ Output voltage offered in 4% tolerance


ABSOLUTE MAXIMUM RATINGS

Characteristic		Symbol	Value	Unit
Input Voltage	LM7805	V	35	V
Operating junction temperature		Topr	0 ~ +150	
Storage temperature		Tstg	-65 ~ +150	

1. BLOCK DIAGRAM

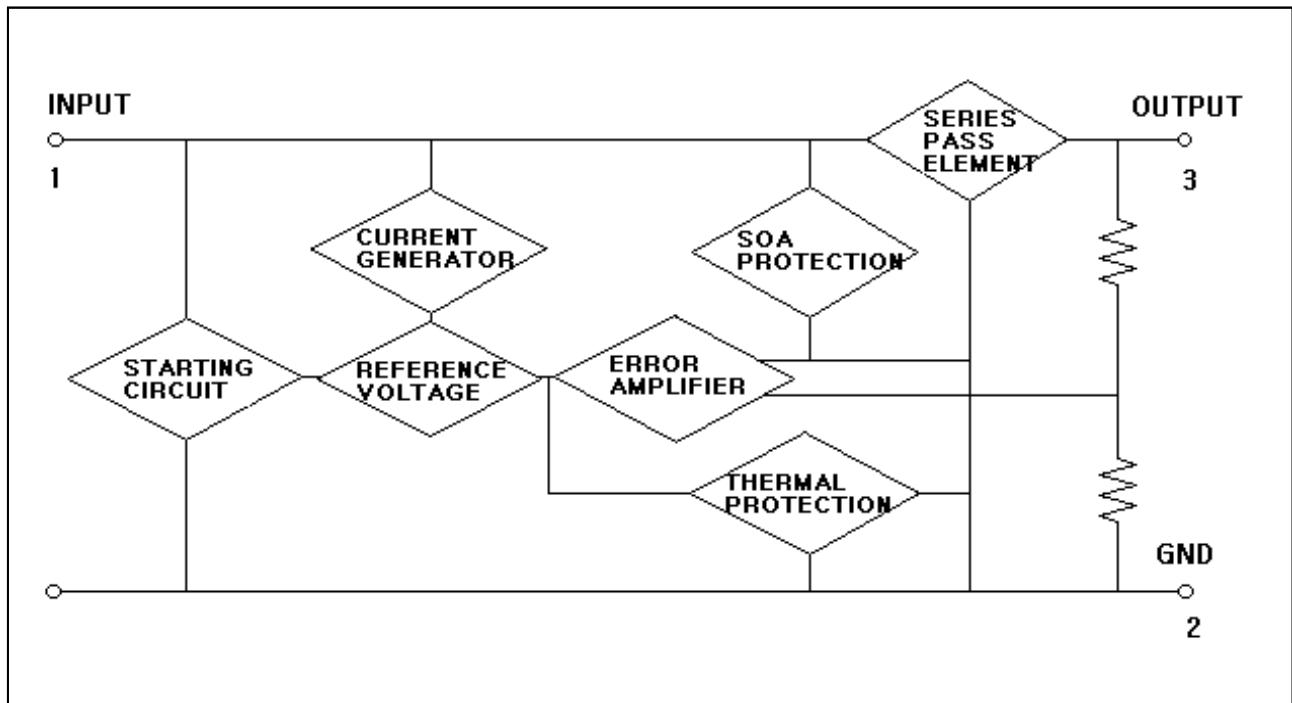

2. TYPICAL APPLICATIONS

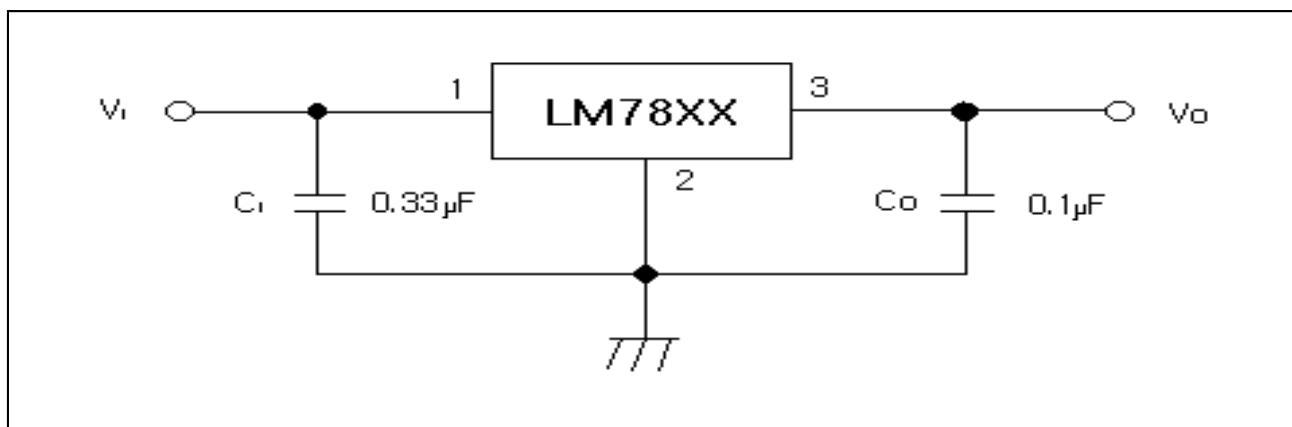

Notes :

- (1) To specify an output voltage, substitute voltage value for "XX"
- (2) C_i is required if regulator is located in appreciable distance from power supply filter.
- (3) C_o improves stability and transient response.

KLM7805 ELECTRICAL CHARACTERISTICS

(Refer to test circuit, $T_{MIN} < T_J < T_{MAX}$, $I_o = 500\text{mA}$, $V_i = 10V$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test condition		Min.	Typ.	Max.	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$		4.8	5.0	5.2	V
		$5.0\text{mA} \leq I_o \leq 1.0\text{A}$, $P_D \leq 15\text{W}$ $V_i = 7V \text{ to } 20V$		4.75	5.0	5.25	
Line Regulation	$\triangle V_o$	$T = 25^\circ\text{C}$	$V_o = 7V \text{ to } 25V$		4.0	100	mV
			$V = 8V \text{ to } 12V$		1.6	50	
Load Regulation	$\triangle V_o$	$T = 25^\circ\text{C}$	$I_o = 5.0\text{mA} \text{ to } 1.5\text{A}$		9	100	mV
			$I_o = 250\text{mA} \text{ to } 750\text{mA}$		4	50	
Quiescent Current	I	$T_J = 25^\circ\text{C}$			5	8	mA
Quiescent Current Change	$\triangle I$	$I_o = 5\text{mA} \text{ to } 1\text{A}$			0.03	0.5	mA
		$V_i = 7V \text{ to } 25V$			0.3	1.3	
		$V_i = 8V \text{ to } 25V$					
Output Voltage Drift	$\triangle V_o / \triangle T$	$I_o = 5\text{mA}$			-0.8		mV / °C
Output Noise Voltage	V_N	$f = 10\text{Hz} \text{ to } 100\text{Khz}$, $T_A = 25^\circ\text{C}$			42		µV
Ripple Rejection	RR	$f = 120\text{Hz}$ $V_o = 8V \text{ to } 18V$		62	73		dB
Dropout Voltage	V_D	$I_o = 1\text{A}$, $T_J = 25^\circ\text{C}$			2		V
Peak Current	I_{PK}	$T_J = 25^\circ\text{C}$			2.2		A
Output Resistance	R_o	$f = 1\text{KHz}$			15		MΩ
Short Circuit Current	I_{SC}	$= 35V$, $T_A = 25^\circ\text{C}$			230		mA

Notes

* $T_{MIN} < T_J < T_{MAX}$ LM78XX ; $T_{MIN} = 0^\circ\text{C}$, $T_{MAX} = 125^\circ\text{C}$ * Load and line regulation are specified at constant junction temperature. Changes in V_o due to heating effects must be taken into account separately. Pulse testing with low duty is used.

LM7806 ELECTRICAL CHARACTERISTICS

(Refer to test circuit, $T_{MIN} < T_J < T_{MAX}$, $I_O = 500\text{mA}$, $V_I = 11\text{V}$, $C = 0.33\mu\text{F}$, $C_O = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test condition		Min.	Typ.	Max.	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$		5.75	6.0	6.25	V
		$5.0\text{mA} \leq I_O \leq 1.0\text{A}$, $P_D \leq 15\text{W}$ $V_I = 8.0\text{V to } 21\text{V}$		5.7	6.0	6.3	
Line Regulation	ΔV_O	$T = 25^\circ\text{C}$	$V_O = 8\text{V to } 25\text{V}$		5	120	mV
			$V_I = 9\text{V to } 13\text{V}$		1.5	60	
Load Regulation	ΔV_O	$T = 25^\circ\text{C}$	$I_O = 5\text{mA to } 1.5\text{A}$		9	120	mV
			$I_O = 250\text{mA to } 750\text{mA}$		3	60	
Quiescent Current	I	$T_J = 25^\circ\text{C}$			5	8	mA
Quiescent Current Change	ΔI_Q	$I_O = 5\text{mA to } 1\text{A}$				0.5	mA
		$V_I = 8\text{V to } 25\text{V}$				1.3	
		$V_I = 9\text{V to } 25\text{V}$					
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_O = 5\text{mA}$			-0.8		mV/°C
Output Noise Voltage	V_N	$f = 10\text{Hz to } 100\text{Khz}$, $T_A = 25^\circ\text{C}$			45		μV
Ripple Rejection	RR	$f = 120\text{Hz}$ $V_I = 9\text{V to } 19\text{V}$		59	75		dB
Dropout Voltage	V_D	$I_O = 1\text{A}$, $T_J = 25^\circ\text{C}$			2		V
Peak Current	I_{PK}	$T_J = 25^\circ\text{C}$			2.2		A
Output Resistance	R_O	$f = 1\text{KHz}$			19		MΩ
Short Circuit Current	I_{SC}	$= 35\text{V}$, $T_A = 25^\circ\text{C}$			250		mA

Notes

* $T_{MIN} < T_J < T_{MAX}$ LM78XX ; $T_{MIN} = 0^\circ\text{C}$, $T_{MAX} = 125^\circ\text{C}$

* Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

LM7808 ELECTRICAL CHARACTERISTICS

(Refer to test circuit, $T_{MIN} < T_J < T_{MAX}$, $I_O = 500\text{mA}$, $V_I = 14V$, $C = 0.33\mu F$, $C_O = 0.1\mu F$, unless otherwise specified)

Characteristic	Symbol	Test condition		Min.	Typ.	Max.	Unit
Output Voltage	V_O	$T_J = 25^\circ C$		7.7	8.0	8.3	V
		$5.0\text{mA} \leq I_O \leq 1.0\text{A}$, $P_O \leq 15W$					
		$V_I = 10.5V$ to $23V$		7.6	8.0	8.4	
		$V_I = 11.5V$ to $23V$					
Line Regulation	ΔV_O	$T = 25^\circ C$	$V = 10.5V$ to $25V$		5.0	160	mV
			$V = 11.5V$ to $17V$		2.0	80	
Load Regulation	ΔV_O	$T = 25^\circ C$	$I_O = 5.0\text{mA}$ to 1.5A		10	160	mV
			$I_O = 250\text{mA}$ to 750mA		5	80	
Quiescent Current	I	$T_J = 25^\circ C$			5	8	mA
Quiescent Current Change	ΔI_Q	$I_O = 5\text{mA}$ to 1A			0.05	0.5	mA
		$V_I = 10.5V$ to $25V$			0.5	1.0	
		$V_I = 11.5V$ to $25V$					
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_O = 5\text{mA}$			-0.8		mV/°C
Output Noise Voltage	V_N	$f = 10\text{Hz}$ to 100Khz , $T_A = 25^\circ C$			52		μV
Ripple Rejection	RR	$f = 120\text{Hz}$, $V_I = 11.5V$ to $21.5V$		56	73		dB
Dropout Voltage	V_D	$I_O = 1\text{A}$, $T_J = 25^\circ C$			2		V
Peak Current	I_{PK}	$T_J = 25^\circ C$			2.2		A
Output Resistance	R_O	$f = 1\text{Khz}$			17		MΩ
Short Circuit Current	I_{SC}	$= 35V$, $T_J = 25^\circ C$			230		mA

Notes

* $T_{MIN} < T_J < T_{MAX}$ LM78XX ; $T_{MIN} = 0^\circ C$, $T_{MAX} = 125^\circ C$

* Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

LM7809 ELECTRICAL CHARACTERISTICS

(Refer to test circuit, $T_{MIN} < T_J < T_{MAX}$, $I_O = 500\text{mA}$, $V_I = 15V$, $C = 0.33\mu\text{F}$, $C_O = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test condition		Min.	Typ.	Max.	Unit
Output Voltage	V _O	$T_J = 25^\circ\text{C}$		8.65	9.0	9.35	V
		$5.0\text{mA} \leq I_O \leq 1.0\text{A}$, $P_D \leq 15\text{W}$					
		$V = 11.5V$ to $24V$		8.6	9.0	9.4	
		$V_I = 12.5V$ to $24V$					
Line Regulation	ΔV_O	$T = 25^\circ\text{C}$	$V = 11.5V$ to $25V$		6.0	180	mV
			$V = 12V$ to $25V$		2	90	
Load Regulation	ΔV_O	$T = 25^\circ\text{C}$	$I_O = 5\text{mA}$ to 1.5A		12	180	mV
			$I_O = 250\text{mA}$ to 750mA		4	90	
Quiescent Current	I	$T_J = 25^\circ\text{C}$			5.0	8	mA
Quiescent Current Change	ΔI_Q	$I_O = 5\text{mA}$ to 1A				0.5	mA
		$V = 11.5V$ to $26V$				1.3	
		$V_I = 12.5V$ to $26V$					
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_O = 5\text{mA}$			-1		mV / °C
Output Noise Voltage	V _N	$f = 10\text{Hz}$ to 100Khz , $T_A = 25^\circ\text{C}$			58		µV
Ripple Rejection	RR	$f = 120\text{Hz}$		56	71		dB
		$V_I = 13V$ to $23V$					
Dropout Voltage	V _D	$I_O = 1\text{A}$, $T_J = 25^\circ\text{C}$			2		V
Peak Current	I _{PK}	$T_J = 25^\circ\text{C}$			2.2		A
Output Resistance	R _O	$f = 1\text{Khz}$			17		MΩ
Short Circuit Current	I _{SC}	$= 35V$, $T_J = 25^\circ\text{C}$			250		mA

Notes

* $T_{MIN} < T_J < T_{MAX}$ LM78XX ; $T_{MIN} = 0^\circ\text{C}$, $T_{MAX} = 125^\circ\text{C}$ * Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

LM7810 ELECTRICAL CHARACTERISTICS

(Refer to test circuit, $T_{MIN} < T_J < T_{MAX}$, $I_O = 500\text{mA}$, $V_I = 16\text{V}$, $C = 0.33\mu\text{F}$, $C_O = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test condition		Min.	Typ.	Max.	Unit
Output Voltage	V _O	$T_J = 25^\circ\text{C}$		9.6	10.0	10.4	V
		$5.0\text{mA} \leq I_O \leq 1.0\text{A}$, $P_D \leq 15\text{W}$					
		$V = 12.5\text{V}$ to 25V		9.5	10	10.5	
		$V_I = 13.5\text{V}$ to 25V					
Line Regulation	ΔV_O	$T = 25^\circ\text{C}$	$V = 12.5\text{V}$ to 25V		10	200	mV
			$V = 13\text{V}$ to 25V		3	100	
Load Regulation	ΔV_O	$T = 25^\circ\text{C}$	$I_O = 5\text{mA}$ to 1.5A		12	200	mV
			$I_O = 250\text{mA}$ to 750mA		4	400	
Quiescent Current	I	$T_J = 25^\circ\text{C}$			5.1	8	mA
Quiescent Current Change	ΔI_Q	$I_O = 5\text{mA}$ to 1.0A				0.5	mA
		$V = 12.5\text{V}$ to 29V				1	
		$V_I = 13.5\text{V}$ to 29V					
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_O = 5\text{mA}$			-1		mV / °C
Output Noise Voltage	V _N	$f = 10\text{Hz}$ to 100Khz , $T_A = 25^\circ\text{C}$			58		µV
Ripple Rejection	RR	$f = 120\text{Hz}$		56	71		dB
		$V_I = 13\text{V}$ to 23V					
Dropout Voltage	V _D	$I_O = 1\text{A}$, $T_J = 25^\circ\text{C}$			2		V
Peak Current	I _{PK}	$T_J = 25^\circ\text{C}$			2.2		A
Output Resistance	R _O	$f = 1\text{Khz}$			17		MΩ
Short Circuit Current	I _{SC}	$= 35\text{V}$, $T_J = 25^\circ\text{C}$			250		mA

Notes

* $T_{MIN} < T_J < T_{MAX}$ LM78XX ; $T_{MIN} = 0^\circ\text{C}$, $T_{MAX} = 125^\circ\text{C}$ * Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

LM7812 ELECTRICAL CHARACTERISTICS

(Refer to test circuit, $T_{MIN} < T_J < T_{MAX}$, $I_O = 500\text{mA}$, $V_I = 19\text{V}$, $C = 0.33\mu\text{F}$, $C_O = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test condition		Min.	Typ.	Max.	Unit
Output Voltage	V _O	$T_J = 25^\circ\text{C}$		11.5	12	12.5	V
		$5.0\text{mA} \leq I_O \leq 1.0\text{A}$, $P_D \leq 15\text{W}$					
		$V = 14.5\text{V}$ to 27V		11.4	12	12.6	
		$V_I = 15.5\text{V}$ to 27V					
Line Regulation	ΔV_O	$T = 25^\circ\text{C}$	$V = 14.5\text{V}$ to 30V		10	240	mV
			$V = 16\text{V}$ to 22V		3	120	
Load Regulation	ΔV_O	$T = 25^\circ\text{C}$	$I_O = 5\text{mA}$ to 1.5A		11	240	mV
			$I_O = 250\text{mA}$ to 750mA		5	120	
Quiescent Current	I	$T_J = 25^\circ\text{C}$			5.1	8	mA
Quiescent Current Change	ΔI_Q	$I_O = 5\text{mA}$ to 1A			0.1	0.5	mA
		$V = 14.5\text{V}$ to 30V			0.5	1.0	
		$V_I = 15\text{V}$ to 30V					
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_O = 5\text{mA}$			-1		mV / °C
Output Noise Voltage	V _N	$f = 10\text{Hz}$ to 100Khz , $T_A = 25^\circ\text{C}$			76		μV
Ripple Rejection	RR	$f = 120\text{Hz}$		55	71		dB
		$V_I = 15\text{V}$ to 25V					
Dropout Voltage	V _D	$I_O = 1\text{A}$, $T_J = 25^\circ\text{C}$			2		V
Peak Current	I _{PK}	$T_J = 25^\circ\text{C}$			2.2		A
Output Resistance	R _O	$f = 1\text{Khz}$			18		MΩ
Short Circuit Current	I _{SC}	$= 35\text{V}$, $T_J = 25^\circ\text{C}$			230		mA

Notes

* $T_{MIN} < T_J < T_{MAX}$ LM78XX ; $T_{MIN} = 0^\circ\text{C}$, $T_{MAX} = 125^\circ\text{C}$ * Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

LM7815 ELECTRICAL CHARACTERISTICS

(Refer to test circuit, $T_{MIN} < T_J < T_{MAX}$, $I_O = 500\text{mA}$, $V_I = 23V$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test condition		Min.	Typ.	Max.	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$		14.4	15	15.6	V
		$5.0\text{mA} \leq I_O \leq 1.0\text{A}$, $P_D \leq 15\text{W}$		14.25	15.0	15.75	
		$V_I = 17.5V$ to $30V$					
Line Regulation	ΔV_O	$T = 25^\circ\text{C}$	$V = 17.5V$ to $30V$		11	300	mV
			$V = 20V$ to $26V$		3	150	
Load Regulation	ΔV_O	$T = 25^\circ\text{C}$	$I_O = 5\text{mA}$ to 1.5A		12	300	mV
			$I_O = 250\text{mA}$ to 750mA		4	150	
Quiescent Current	I	$T_J = 25^\circ\text{C}$			5.2	8	mA
Quiescent Current Change	ΔI_Q	$I_O = 5\text{mA}$ to 1A				0.5	mA
		$V_I = 17.5V$ to $30V$				1.0	
		$V_I = 18.5V$ to $30V$					
Output Voltage Drift	$\Delta V_O/\Delta T$	$I_O = 5\text{mA}$			-1		mV/°C
Output Noise Voltage	V_N	$f = 10\text{Hz}$ to 100Khz , $T_A = 25^\circ\text{C}$			90		μV
Ripple Rejection	RR	$f = 120\text{Hz}$		54	70		dB
$V_I = 18.5V$ to $28.5V$							
Dropout Voltage	V_D	$I_O = 1\text{A}$, $T_J = 25^\circ\text{C}$			2		V
Peak Current	I_{PK}	$T_J = 25^\circ\text{C}$			2.2		A
Output Resistance	R_O	$f = 1\text{KHz}$			19		MΩ
Short Circuit Current	I_{SC}	$= 35V$, $T_A = 25^\circ\text{C}$			250		mA

Notes

* $T_{MIN} < T_J < T_{MAX}$ LM78XX ; $T_{MIN} = 0^\circ\text{C}$, $T_{MAX} = 125^\circ\text{C}$

* Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

LM7818 ELECTRICAL CHARACTERISTICS

(Refer to test circuit, $T_{MIN} < T_J < T_{MAX}$, $I_O = 500\text{mA}$, $V_I = 27V$, $C = 0.33\mu\text{F}$, $C_O = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test condition		Min.	Typ.	Max.	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$		17.3	18	18.7	V
		$5.0\text{mA} \leq I_O \leq 1.0\text{A}$, $P_D \leq 15\text{W}$ $V_I = 21\text{V to } 33\text{V}$		17.1	18.0	18.9	
Line Regulation	ΔV_O	$T = 25^\circ\text{C}$	$V = 21\text{V to } 33\text{V}$		15	360	mV
			$V = 24\text{V to } 30\text{V}$		5	180	
Load Regulation	ΔV_O	$T = 25^\circ\text{C}$	$I_O = 5\text{mA to } 1.5\text{A}$		15	360	mV
			$I_O = 250\text{mA to } 750\text{mA}$		5	180	
Quiescent Current	I	$T_J = 25^\circ\text{C}$			5.2	8	mA
Quiescent Current Change	ΔI_Q	$I_O = 5\text{mA to } 1\text{A}$				0.5	mA
		$V_I = 21\text{V to } 33\text{V}$				1	
		$V_I = 22\text{V to } 33\text{V}$					
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_O = 5\text{mA}$			-1		mV/°C
Output Noise Voltage	V_N	$f = 10\text{Hz to } 100\text{Khz}$, $T_A = 25^\circ\text{C}$			110		μV
Ripple Rejection	RR	$f = 120\text{Hz}$ $V_I = 22\text{V to } 32\text{V}$		53	69		dB
Dropout Voltage	V_D	$I_O = 1\text{A}$, $T_J = 25^\circ\text{C}$			2		V
Peak Current	I_{PK}	$T_J = 25^\circ\text{C}$			2.2		A
Output Resistance	R_O	$f = 1\text{KHz}$			22		MΩ
Short Circuit Current	I_{SC}	$= 35\text{V}$, $T_A = 25^\circ\text{C}$			250		mA

Notes

* $T_{MIN} < T_J < T_{MAX}$ LM78XX ; $T_{MIN} = 0^\circ\text{C}$, $T_{MAX} = 125^\circ\text{C}$

* Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

LM7824 ELECTRICAL CHARACTERISTICS

(Refer to test circuit, $T_{MIN} < T_J < T_{MAX}$, $I_O = 500\text{mA}$, $V_I = 33V$, $C_i = 0.33\mu\text{F}$, $C_o = 0.1\mu\text{F}$, unless otherwise specified)

Characteristic	Symbol	Test condition		Min.	Typ.	Max.	Unit
Output Voltage	V_O	$T_J = 25^\circ\text{C}$		23	24	25	V
		$5.0\text{mA} \leq I_O \leq 1.0\text{A}$, $P_D \leq 15\text{W}$ $V_I = 27\text{V}$ to 38V		22.8	24.0	25.2	
Line Regulation	ΔV_O	$T = 25^\circ\text{C}$	$V = 27\text{V}$ to 38V		17	480	mV
			$V = 30\text{V}$ to 36V		6	240	
Load Regulation	ΔV_O	$T = 25^\circ\text{C}$	$I_O = 5\text{mA}$ to 1.5A		15	480	mV
			$I_O = 250\text{mA}$ to 750mA		5	240	
Quiescent Current	I	$T_J = 25^\circ\text{C}$			5.2	8	mA
Quiescent Current Change	ΔI_Q	$I_O = 5\text{mA}$ to 1A			0.1	0.5	mA
		$V_I = 27\text{V}$ to 38V			0.5	1	
		$V_I = 28\text{V}$ to 38V					
Output Voltage Drift	$\Delta V_O / \Delta T$	$I_O = 5\text{mA}$			-1.5		mV/°C
Output Noise Voltage	V_N	$f = 10\text{Hz}$ to 100Khz , $T_A = 25^\circ\text{C}$			60		μV
Ripple Rejection	RR	$f = 120\text{Hz}$ $V_I = 28\text{V}$ to 38V		50	67		dB
Dropout Voltage	V_D	$I_O = 1\text{A}$, $T_J = 25^\circ\text{C}$			2		V
Peak Current	I_{PK}	$T_J = 25^\circ\text{C}$			2.2		A
Output Resistance	R_O	$f = 1\text{KHz}$			28		MΩ
Short Circuit Current	I_{SC}	$V_I = 35\text{V}$, $T_A = 25^\circ\text{C}$			230		mA

Notes

* $T_{MIN} < T_J < T_{MAX}$ LM78XX ; $T_{MIN} = 0^\circ\text{C}$, $T_{MAX} = 125^\circ\text{C}$ * Load and line regulation are specified at constant junction temperature. Changes in V_O due to heating effects must be taken into account separately. Pulse testing with low duty is used.

