


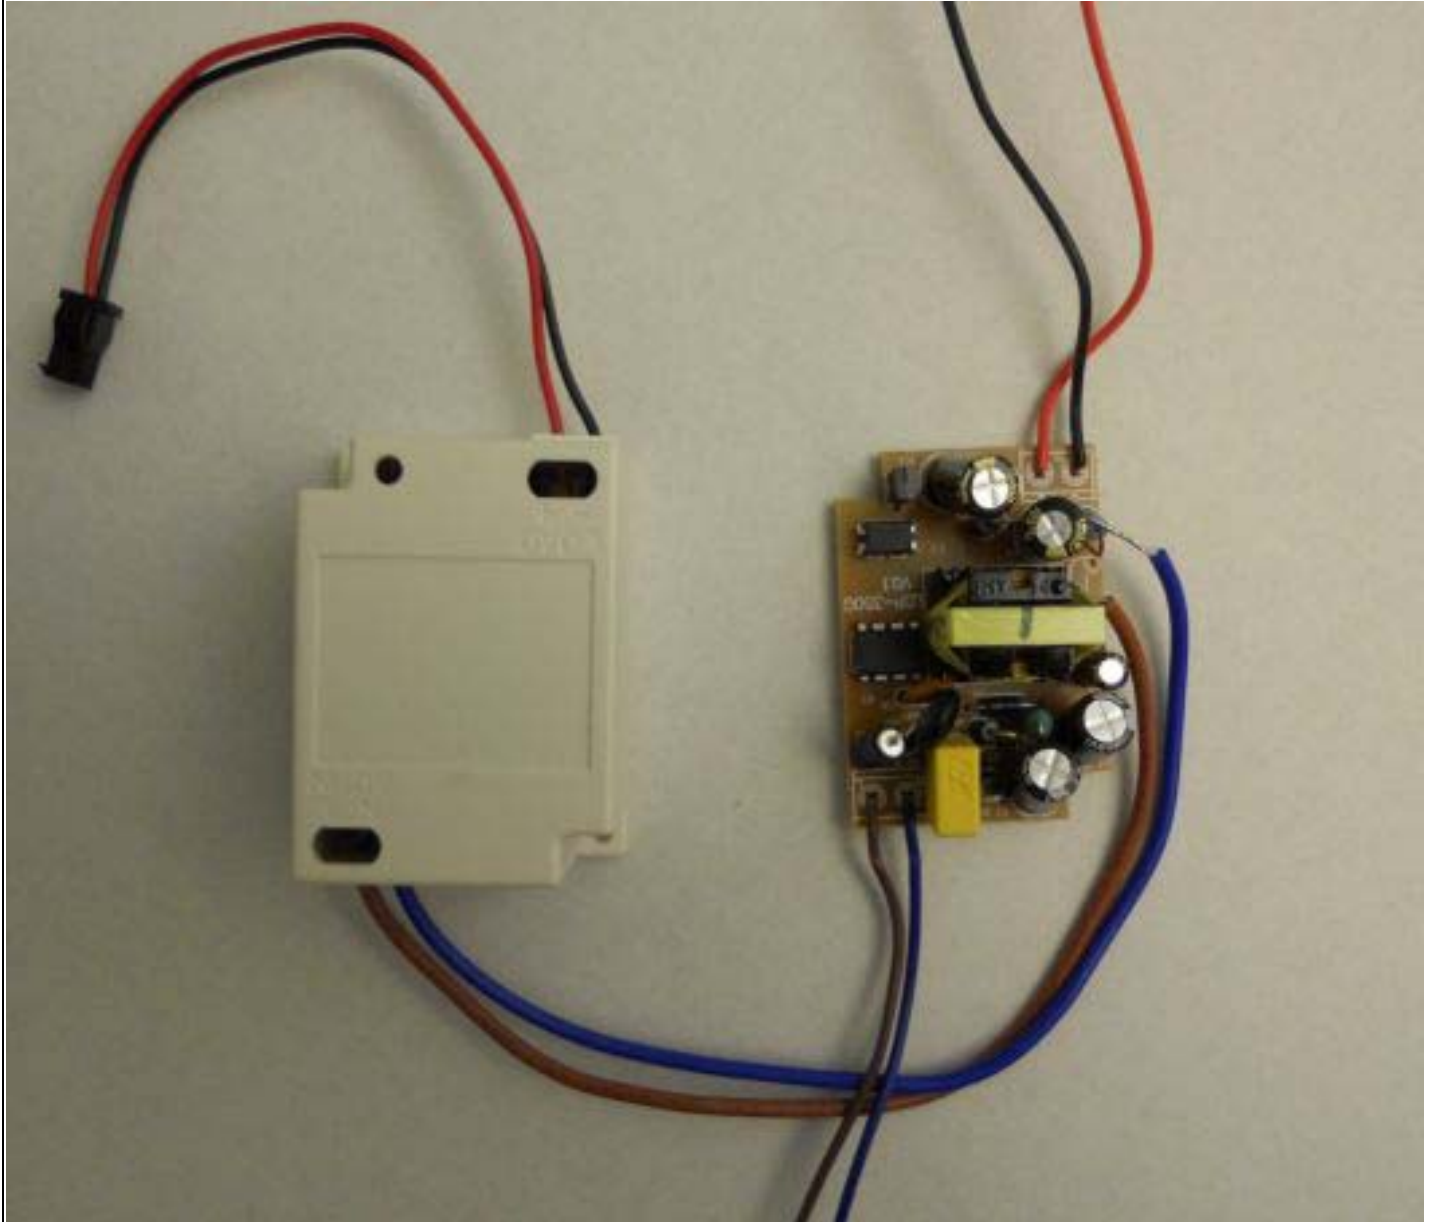


志燁股份有限公司

CHEERTECH TECHNOLOGY CO.,LTD.

SPECIFICATION		
Description	LED DRIVER	
Model	LCP-350G (18~28V 350mA)	
Input	Voltage Range	100-240VAC
	Frequency Range	50-60Hz
	AC Current	0.5A MAX
	Inrush Current	30A/240VAC
	Power Consumption	0.3W
Output	DC Output Voltage	18~28V
	DC Output Current	Constant Current 350mA±7%
Pout	MAX 10W	
Protection	Short Circuit Protection, Over Load Protection	
Environment	Operating Temperature and Humidity Range	0 to 40 , 20% to 90%
	Storage Temperature and Humidity Range	-20 to 70 , 20% to 90%
Efficiency	Efficiency	76.04%MIN
Safety File	CE-EMC:EN55015,EN61547,EN61000-3-2,EN61000-3-3 CE-LVD: EN61347-1,EN61347-2-3 FCC Part 15B 	
Note	Indoor use only	

Case Dimension	Dimension(mm)LxWxH	60*40*30
-----------------------	--------------------	----------



DC/AC CORD	AC 端入線(藍棕線), 1015# 22AWG 線長 200mm, 剝線鍍錫 10mm DC 端出線(紅黑線), 1007# 22AWG 線長 150mm, 剝線鍍錫 10mm	
-------------------	--	--