

SRLF2020CT THUR SRLF2040CT

SCHOTTKY BARRIER RECTIFIERS


ITO-220AB

FEATURES:

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive centertap
- Metal silicon junction Majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25" (6.35mm) from case

MECHANICAL DATA

Case : JEDEC ITO-220AB molded plastic
 Terminals : Leads solderable per MIL-STD-750 Method 2026
 Polarity : As marked
 Mounting Position : Any
 Mounting Torque 5 in - lbs. max
 Weight : 0.08 ounce, 2.24 grams

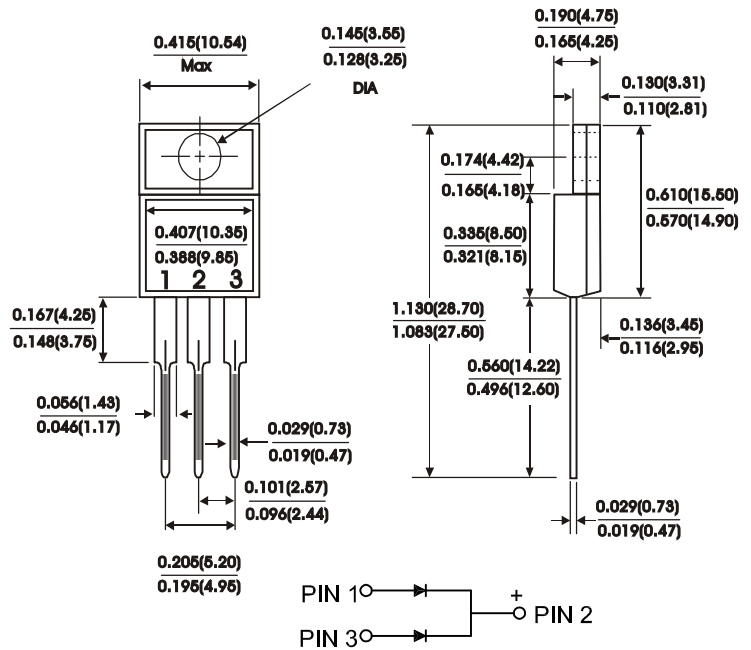

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase half wave, 60 Hz resistive or inductive load.
 For capacitive load, derate current by 20%.

Characteristic	Symbol	SRLF2020CT	SRLF2030CT	SRLF2040CT	Units
Maximum recurrent peak reverse voltage	V_{RRM}	20	30	40	Volts
Maximum RMS voltage	V_{RMS}	14	21	28	Volts
Maximum DC blocking voltage	V_{DC}	20	30	40	Volts
Maximum average forward rectified current at $T_c = 105^\circ\text{C}$	$I_{(AV)}$	20			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)(Per leg)	I_{FSM}	175			Amps
Maximum instantaneous forward voltage (Per leg)(NOTE 2) $I_F = 10\text{A}$	V_F	0.60			Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Per leg)(NOTE 2) $T_c = 25^\circ\text{C}$ $T_c = 100^\circ\text{C}$	I_R	1.0 50			mA
Typical thermal resistance (Per leg)(NOTE 1)	R_{th-JC}	4.0			$^\circ\text{C}/\text{W}$
Operating temperature range	T_J	-40to + 125			$^\circ\text{C}$
Storage temperature range	T_{Stg}	-40to + 125			$^\circ\text{C}$

NOTES:
 (1) Thermal resistance from junction to case
 (2) Pulse test : 300 us pulse width, 1% duty cycle
 (3) Marking : $\frac{\text{SRLF2020CT}}{\text{Symbol}} = \frac{\text{SRLF2020}}{\text{Marking}}$ (Whitout Marking "CT")

RATINGS AND CHARACTERISTIC CURVES SRLF2020CT THRU SRLF2040CT

FIG.1 - TYPICAL FORWARD CURRENT DERATING CURVE

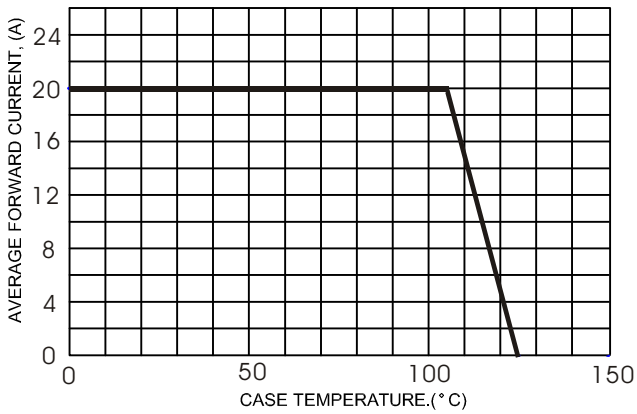


FIG.2 - TYPICAL FORWARD CHARACTERISTICS

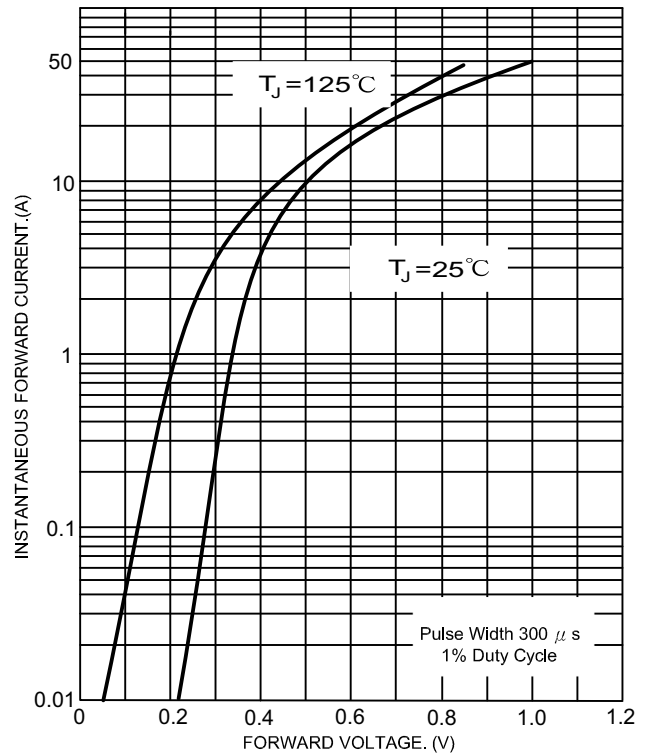


FIG.3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

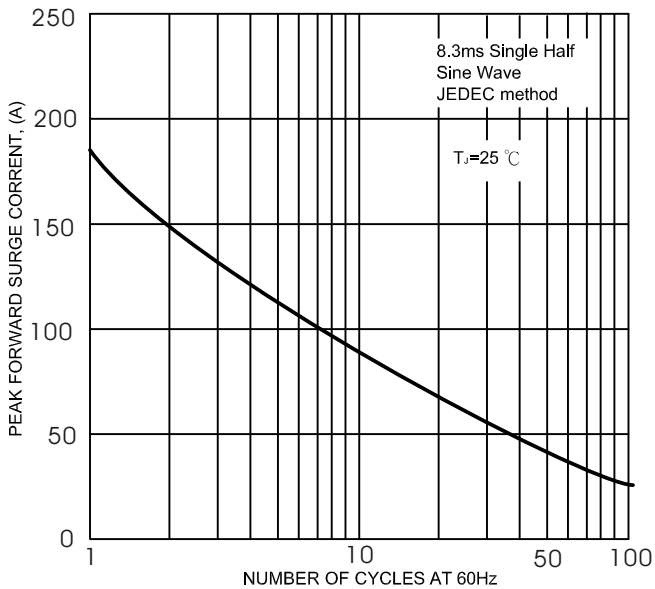


FIG.5- TYPICAL REVERSE CHARACTERISTICS

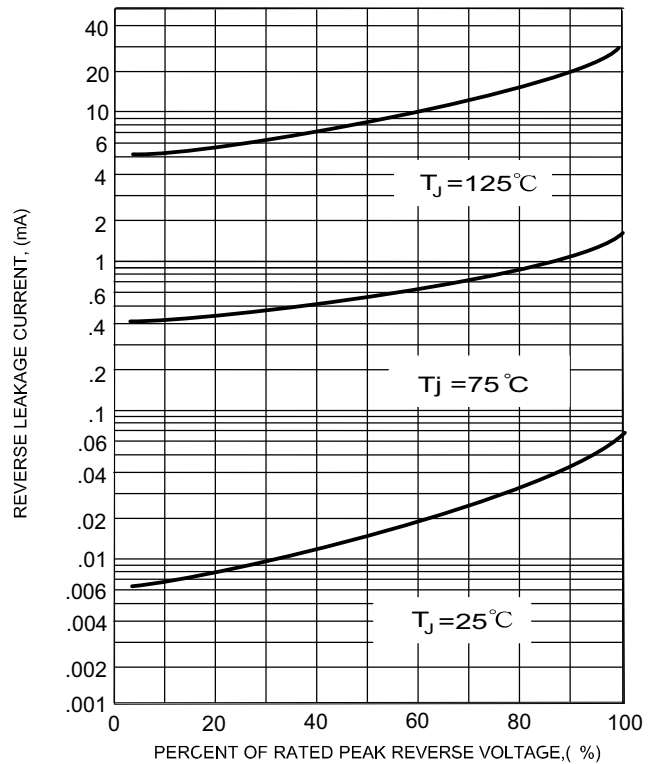


FIG.4- TYPICAL JUNCTION CAPACITANCE

